

Accessories

CURRENT TRANSFORMERS

- Up to 1000 A of primary current.
- Transformers ratio .../5.
- Sealable connection terminal box, metal brackets for fitting and bus-bar holders included.
- Standards: IEC 60044-1, BS 2627

Primary .../ 5A	Model	Code	VA class		
			0,2	0,5	1
50	CT20	41399	-	-	2.5
75	CT20	41400	-	-	2.5
100	CT20	41404	-	-	2.5
150	CT20	41406	-	2.5	3.5
200	CT30	41412	-	5	7.5
250	CT30	41414	-	5	7.5
300	CT30	41416	-	5	7.5
400	CT30	41418	-	5	7.5
500	CT50	41422	-	10	15
600	CT50	41424	-	10	15
800	CT50	41426	-	10	15
1000	CT50	41428	15	20	30

CT




CE

CHARACTERISTICS

Overload	1,2 I_N
Max. line voltage bus-bars / cable 1000V	660V / 1000V
Max. size: bus-bars / Ø cable (mm) CT 20	30 x 10 / Ø 23
Max. size: bus-bars / Ø cable (mm) CT 30	40 x 10 / Ø 30
Max. size: bus-bars / Ø cable (mm) CT 50	60 x 10 / Ø 45

DIMENSIONS CT (mm)

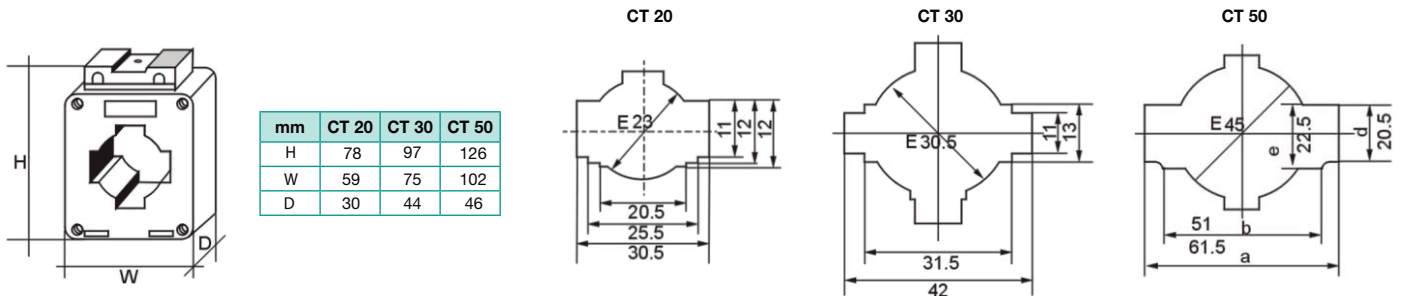

INSTALLATION WAY

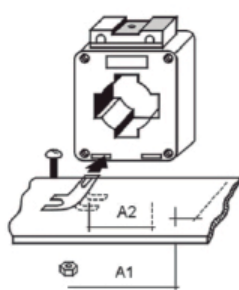


Diagram 1 Fix it with angled flake

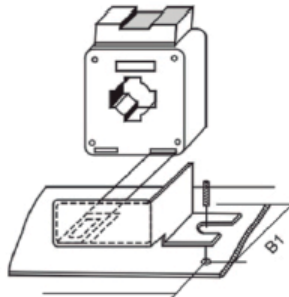


Diagram 2 Fix it on two sides

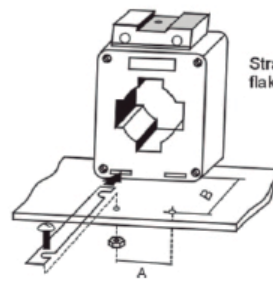


Diagram 3 Fix it with straight flake

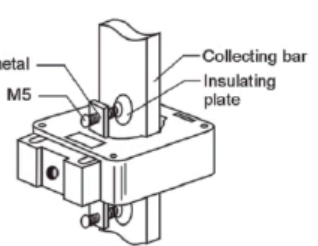


Diagram 4 Straight metal flake tight

WIRING DIAGRAM FOR C9 - GL16 - P19 - PF16 - G - BG (mm)

